

CURRENT 15 Ampere  
VOLTAGE RANG 40 to 200 Volts


# MBR1540FAC THRU MBR15200FAC

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O.
- Flame Retardant Epoxy Molding Compound.
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency.
- High current capability
- Guardring for overvoltage protection
- For use in low voltage,high frequency inverters free wheeling , and polarity protection applications.
- In compliance with EU RoHS 2002/95/EC directives

## MECHANICAL DATA

- Case: ITO-220AB molded plastic
- Terminals: solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Mounting Position: Any
- Weight: 0.055 ounces, 1.56 grams.

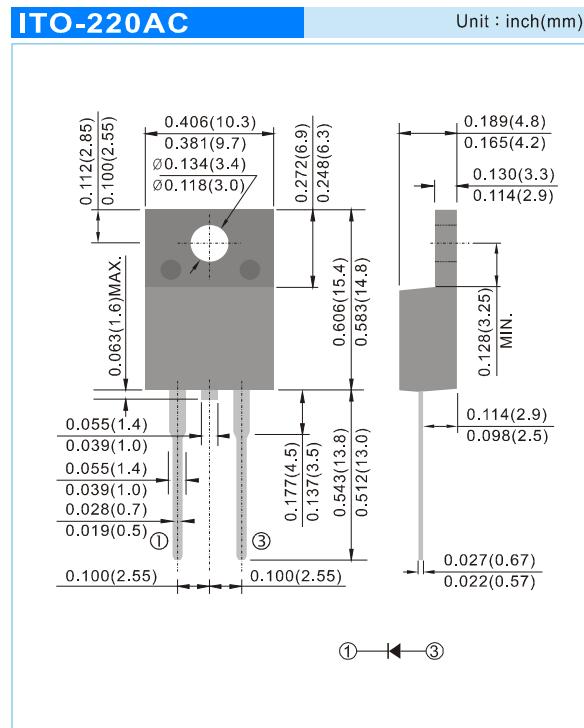

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	MBR 1540FAC	MBR 1545FAC	MBR 1550FAC	MBR 1560FAC	MBR 1580FAC	MBR 1590FAC	MBR 15100FAC	MBR 15150FAC	MBR 15200FAC	UNITS						
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	40	45	50	60	80	90	100	150	200	V						
Maximum RMS Voltage	V <sub>RMS</sub>	28	31.5	35	42	56	63	70	105	140	V						
Maximum DC Blocking Voltage	V <sub>DC</sub>	40	45	50	60	80	90	100	150	200	V						
Maximum Average Forward Current (See fig.1)	I <sub>F(AV)</sub>	15									A						
Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I <sub>FSM</sub>	175									A						
Maximum Forward Voltage at 15A, per leg	V <sub>F</sub>	0.7		0.75		0.8		0.9		V							
Maximum DC Reverse Current T <sub>J</sub> =25 °C at Rated DC Blocking Voltage T <sub>J</sub> =125°C	I <sub>R</sub>	0.05 20									mA						
Typical Thermal Resistance	R <sub>θJC</sub>	2									°C / W						
Operating and Storage Junction Temperature Range	T <sub>J,TSTG</sub>	-55 to + 150	-65 to + 175														

Notes :

Both Bonding and Chip structure are available.

CURRENT 15 Ampere  
VOLTAGE RANG 40 to 200 Volts

# MBR1540FAC THRU MBR15200FAC

## RATING AND CHARACTERISTIC CURVES

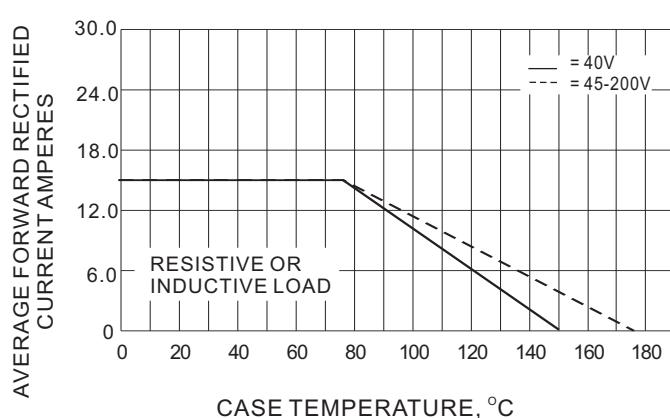


Fig.1- FORWARD CURRENT DERATING CURVE

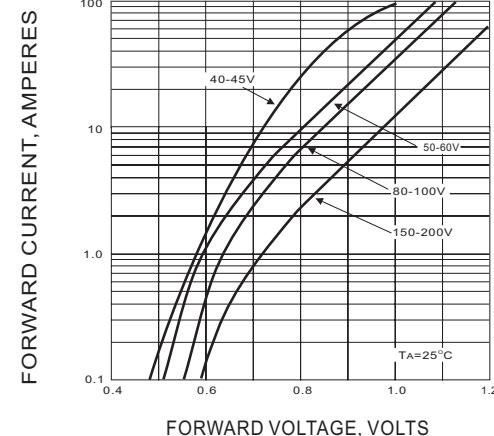


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

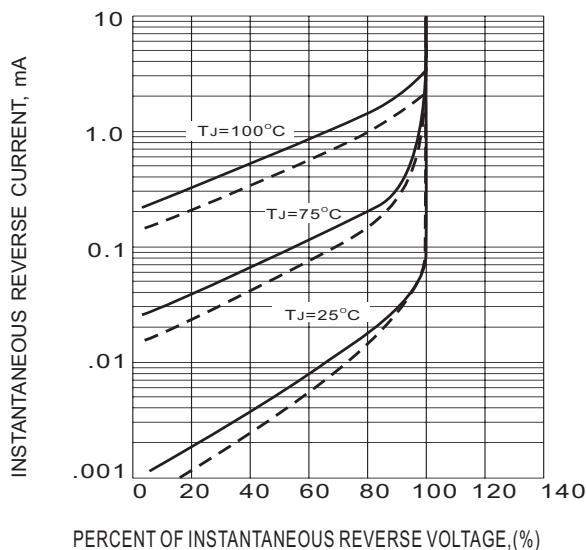


Fig.3- TYPICAL REVERSE CHARACTERISTICS

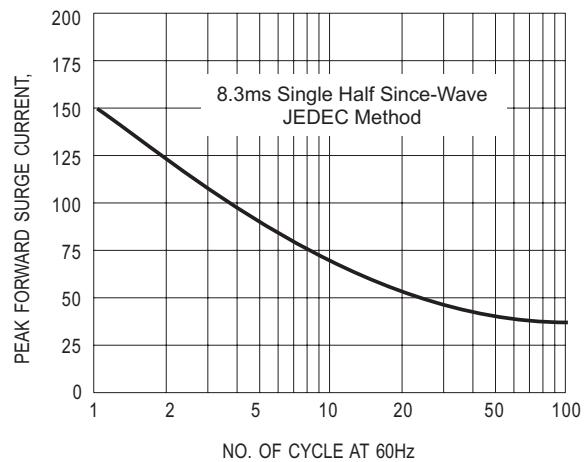


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS