

CURRENT 4.0 Ampere
 VOLTAGE RANG 50 to 1000 Volts

MUR405 THRU MUR4100


DO-27 / DO-201AD

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ultra fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-201AD molded plastic body
 Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
 Polarity: Color band denotes cathode end
 Mounting Position: Any
 Weight: 0.04 ounce, 1.10 grams

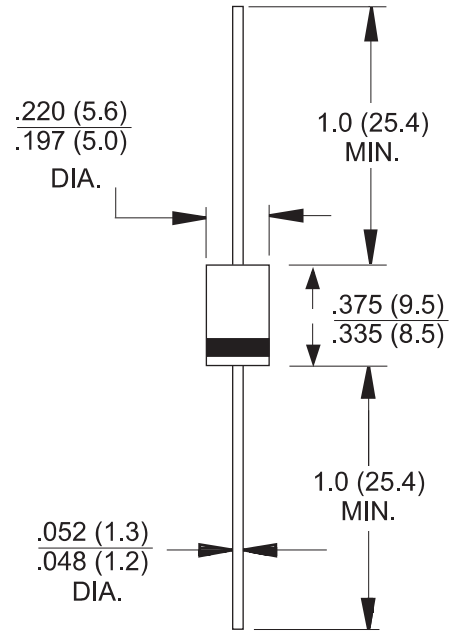

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Catalog Number	SYMBOLS	MUR405	MUR410	MUR415	MUR420	MUR440	MUR460	MUR480	MUR4100	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	105	140	280	420	550	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	150	200	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length	$I_{(AV)}$	4.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150								Amps
Maximum instantaneous forward voltage at 4.0A	V_F	0.875			1.25		1.85			Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=150^\circ\text{C}$	I_R	2.0			5.0		150.0			μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	25			50					ns
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	27.0			50.0					$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175								$^\circ\text{C}$

Note: 1. Reverse recovery condition $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted


CURRENT 4.0 Ampere
 VOLTAGE RANG 50 to 1000 Volts

MUR405 THRU MUR4100

RATING AND CHARACTERISTIC CURVES MUR405 Thru MUR4100


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

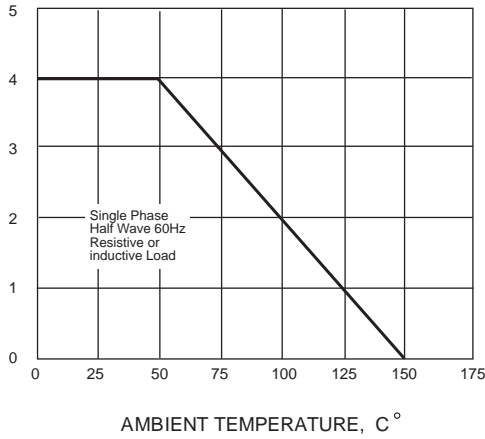


PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

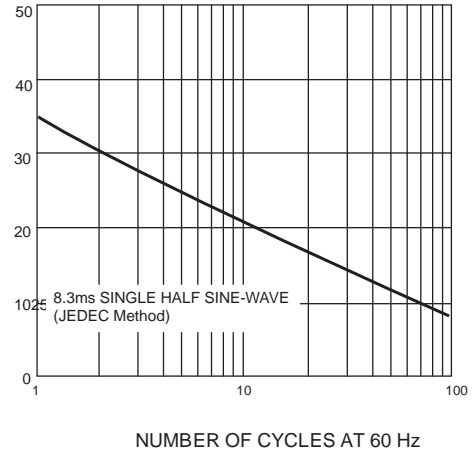


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

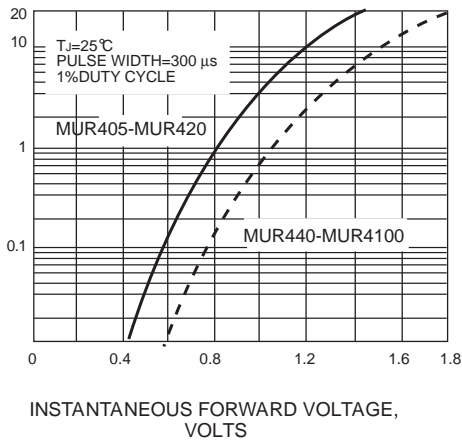

INSTANTANEOUS REVERSE CURRENT, MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

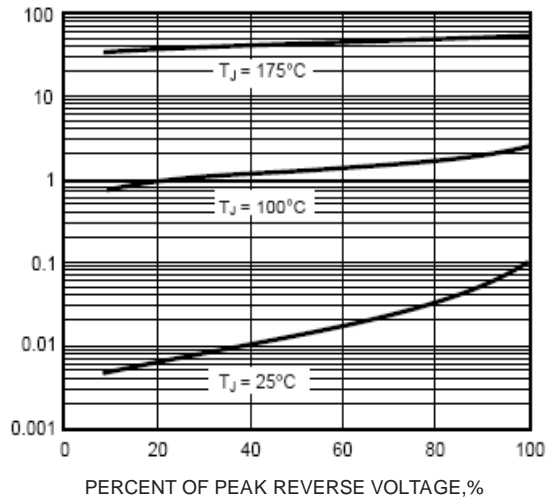

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

