


CURRENT 3.0 Ampere
 VOLTAGE RANG 50 to 1000 Volts

RS3ABF THRU RS3MBF

SMBF

FEATURES

- Glass Passivated chip junction
- Built-in strain relief
- Fast switching speed for high efficiency
- High temperature soldering guaranteed: 250 /10 second at terminals

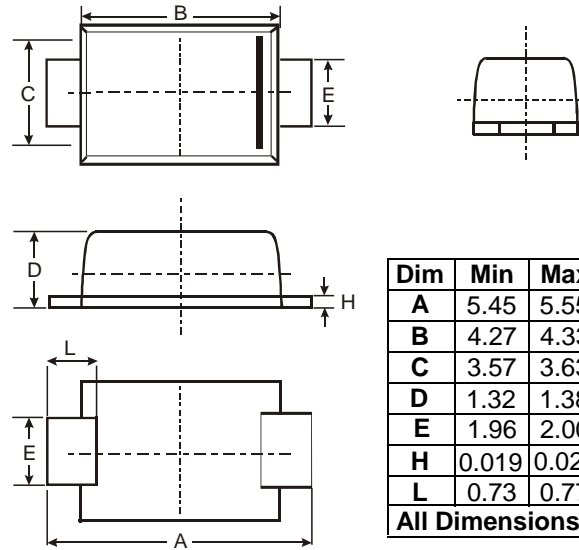

Dim	Min	Max	Typ
A	5.45	5.55	5.50
B	4.27	4.33	4.30
C	3.57	3.63	3.60
D	1.32	1.38	1.35
E	1.96	2.00	1.98
H	0.019	0.021	0.20
L	0.73	0.77	0.75
All Dimensions in mm			

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Solder plated, solderable per MIL-STD-202E method208C
- Polarity: Color band denotes cathode end
- Weight: 0.002ounce, 0.09 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25 ambient temperature unless otherwise specified.
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%.

	SYMBOLS	RS3A	RS3B	RS3D	RS3G	RS3J	RS3K	RS3M	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at $T_L=100$	$I_{(AV)}$	3.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	I_{FSM}	100							Amps
Maximum Instantaneous Forward Voltage at 3.0A	V_F	1.3							Volts
Maximum DC Reverse Current at rated DC blocking voltage at	$T_A = 25$	10.0							A
	$T_A = 125$	250							
Typical Reverse Recovery Time Test conditions $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$	T_{rr}	150				250	500		ns
Typical Junction Capacitance (NOTE 2)	C_J	60							pF
Typical Thermal Resistance (NOTE 1)	$R_{\theta JA}$	50							/W
	$R_{\theta JL}$	15							
Operating Junction Temperature Range	T_J	-55 to +150							
Storage Temperature Range	T_{STG}	-55 to +150							

Notes:

1. Thermal resistance from Junction to ambient and from junction to lead mounted on PCB with 0.3×0.3" (8.0 × 8.0mm) copper pad areas.
2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts

CURRENT 3.0 Ampere
 VOLTAGE RANG 50 to 1000 Volts

RS3ABF THRU RS3MBF

RATING AND CHARACTERISTIC CURVES RS3A Thru RS3M

FIG.1-FORWARD CURRENT DERATING CURVE

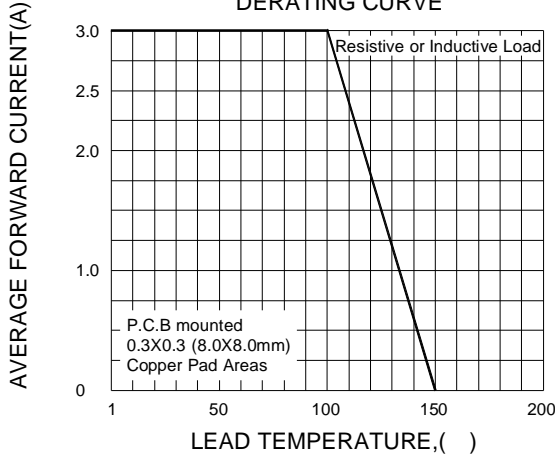


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

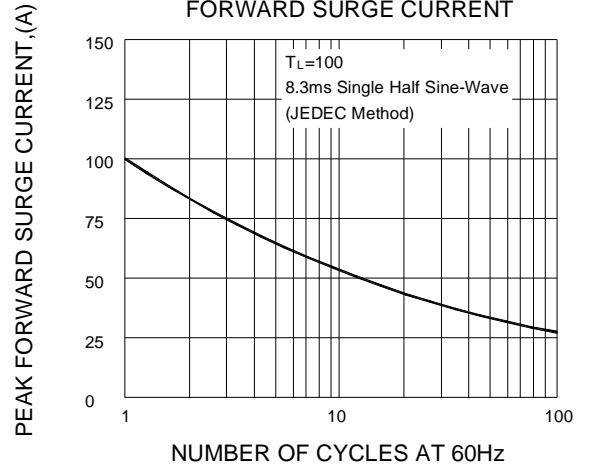


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

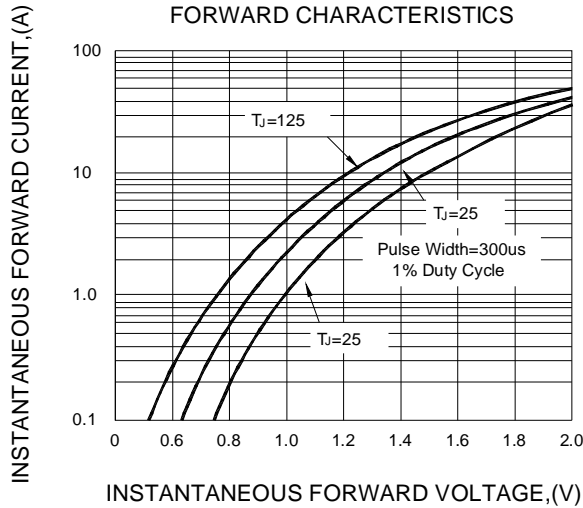


FIG.4-TYPICAL REVERSE CHARACTERISTICS

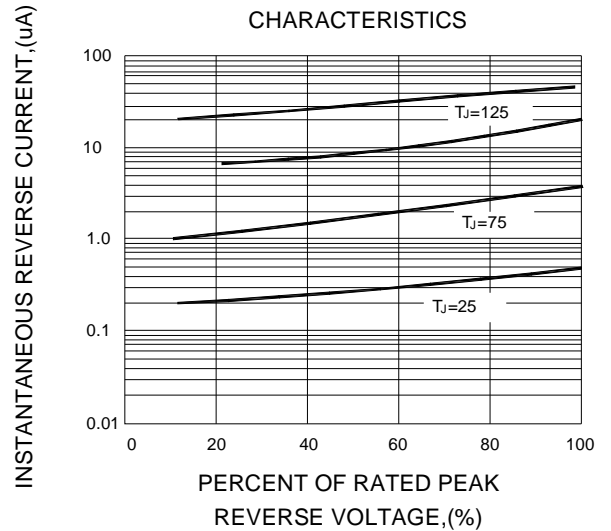


FIG.5-TYPICAL JUNCTION CAPACITANCE

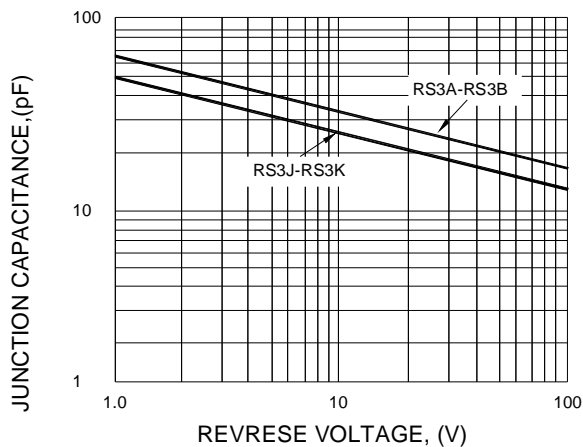


FIG.6-TRANSIENT THERMAL IMPEDANCE

